


SCALE 1:5

**NOTE:** (\*) These dimension can be increased for low polarity motors, and must be confirmed together with detailed datasheet definition.  
 (\*\*\*) Dimensions dependent on the motor winding configuration.  
 General tolerance: geometrical tolerance (ISO 2768-2) class K linear tolerance (ISO 2768-2) class M.  
 (\*\*\*\*) Suggested position for hydraulic connectors.  
 (\*\*\*\*\*) To calculate the minimum number of screws, use follows formulas:  
 X (N° Stator screw)= Stack length \* 0.145  
 Y (N° Rotor screws)= Stack length \* 0.175  
 Calculation for screws property class 8.8  
 The number of screws can be reduced using higher property classes.

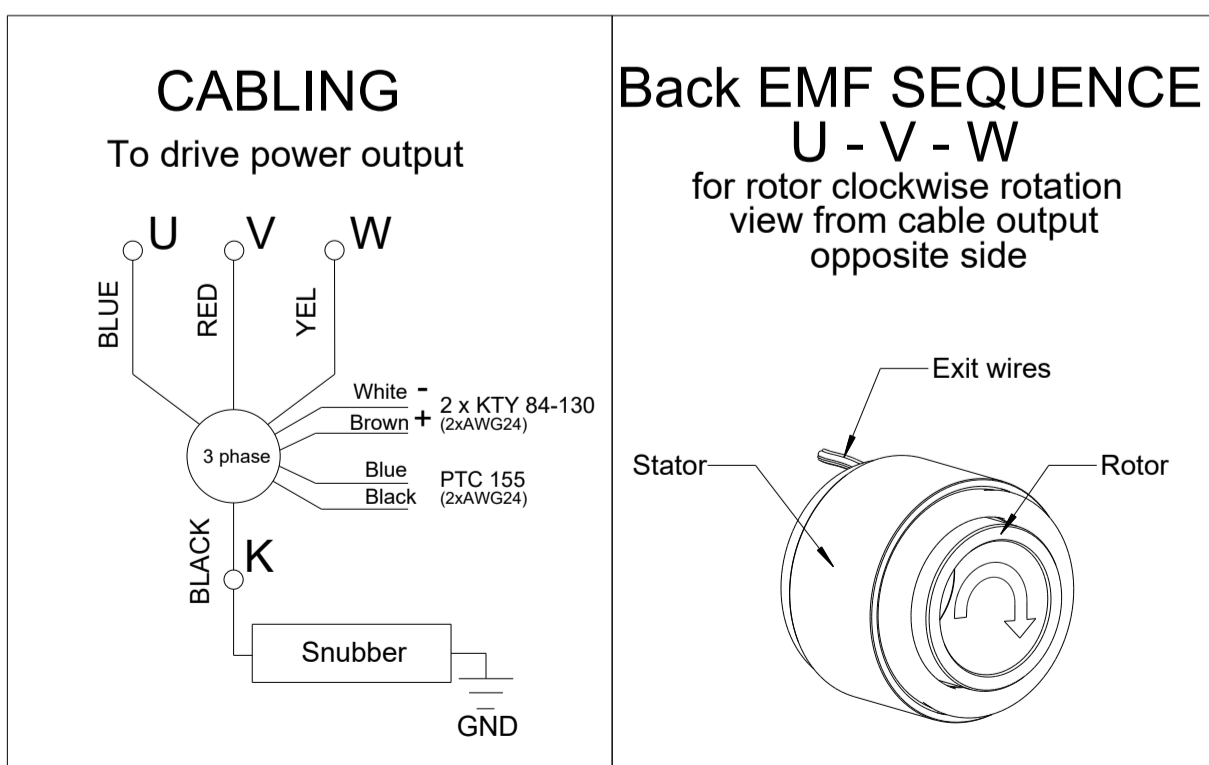

Wires Data	
Type Motor	Squid Torque Motor
Power Wires (U,V,W)	Radox (**) mmq
Neutral Wire (K)	1mmq
Sensor Wires	AWG24
Length wires	1000 mm

Type: Squid Torque Motor  
 TK570-xxx-yyy

